



APPENDIX B **TYPICAL EROSION CONTROL MEASURE DETAILS**

Figure GSF-3 Toe of Slope Installations with Wings

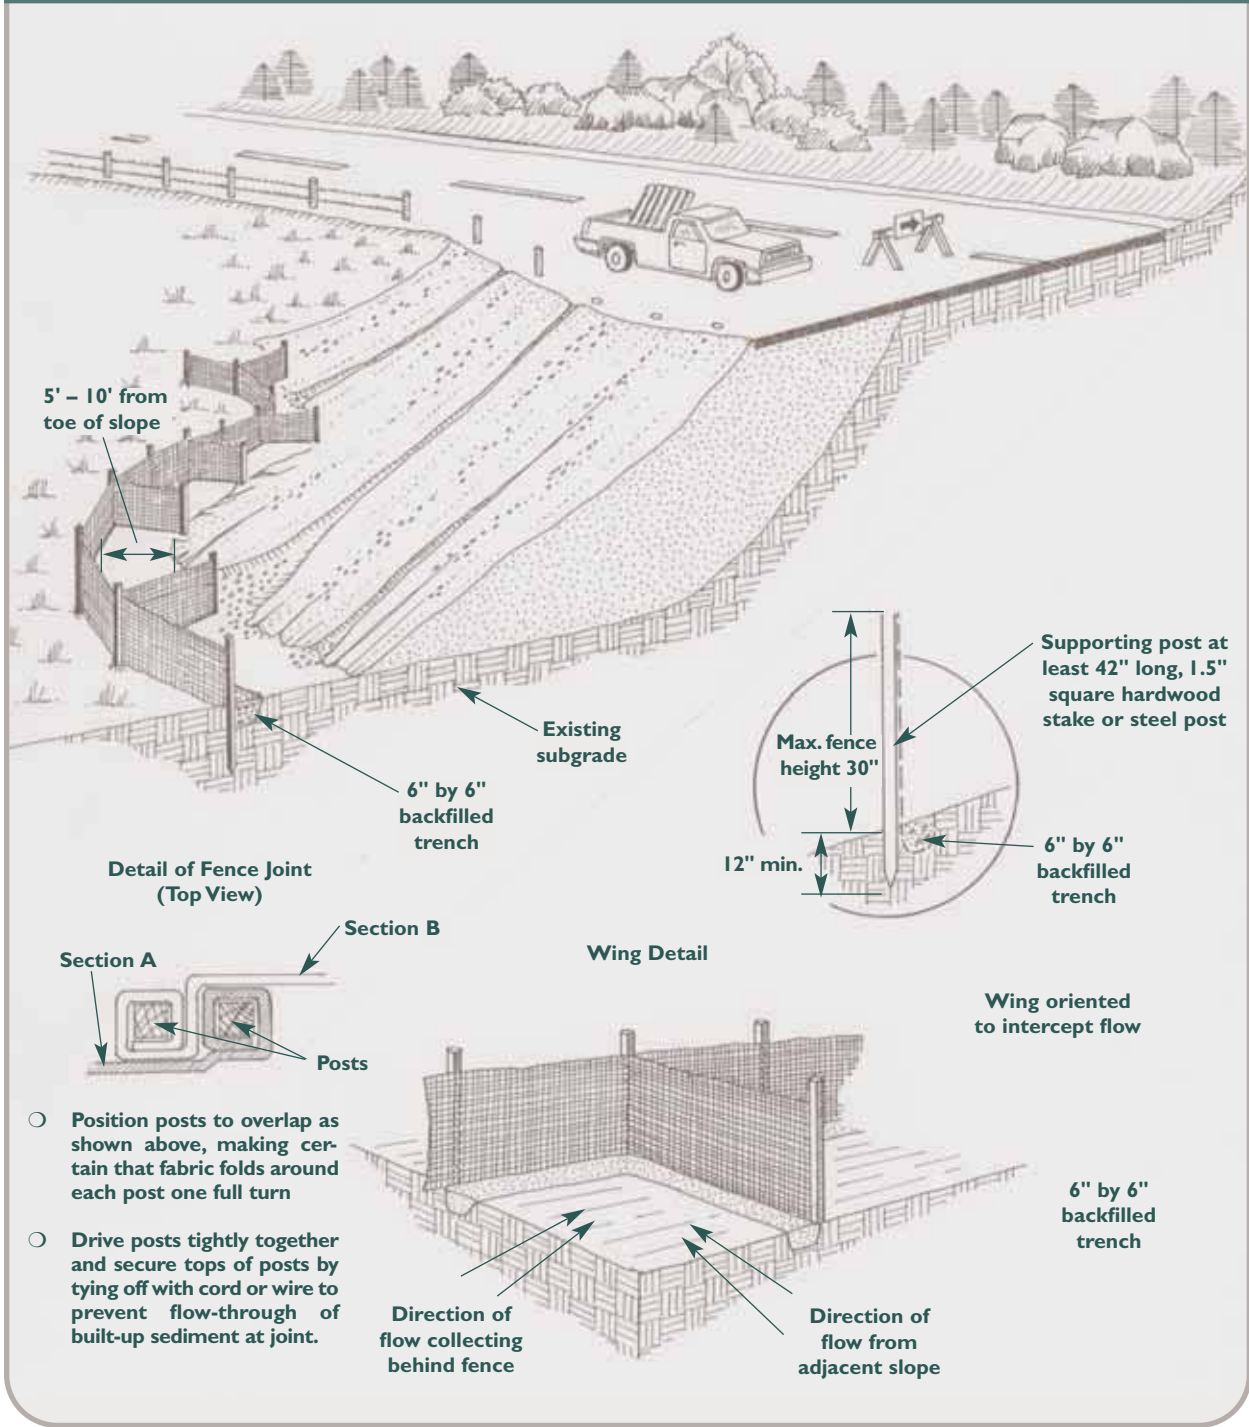


Geotextile Silt Fence (GSF)

Figure SCD-2 Stone Check Dam Installation in Drainageways

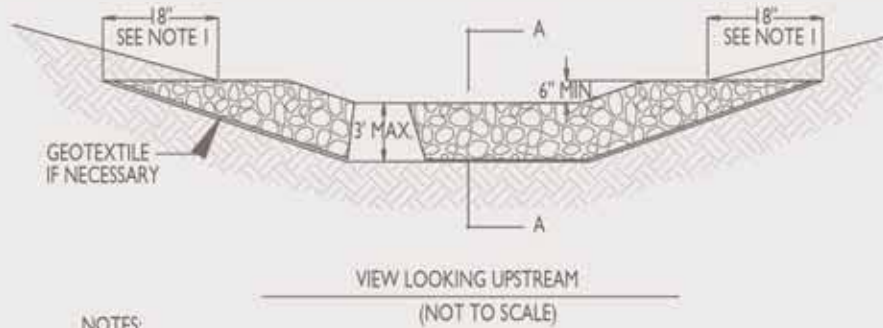


NOTES:

1. KEY STONE INTO THE DITCH BANKS AND EXTEND INTO THE ABUTMENTS A MINIMUM OF 18" TO PREVENT FLOW FROM FLANKING THE CHECK DAM.
2. THE MINIMUM DESIGN CAPACITY SHALL CONVEY A 2 YEAR - 24 HOUR PEAK FLOW.

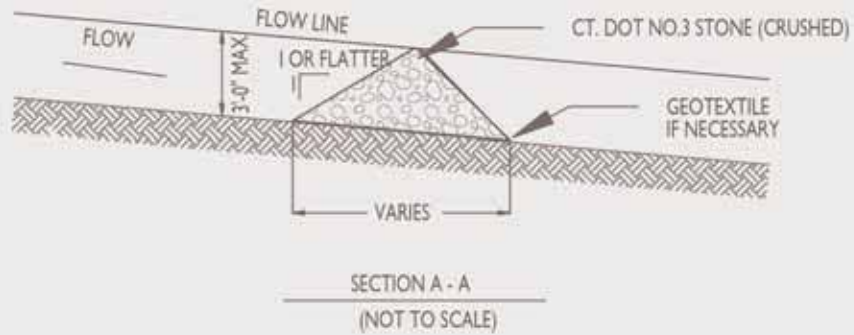

'L' = THE DISTANCE SUCH THAT POINTS 'A' AND 'B' ARE OF EQUAL ELEVATION.

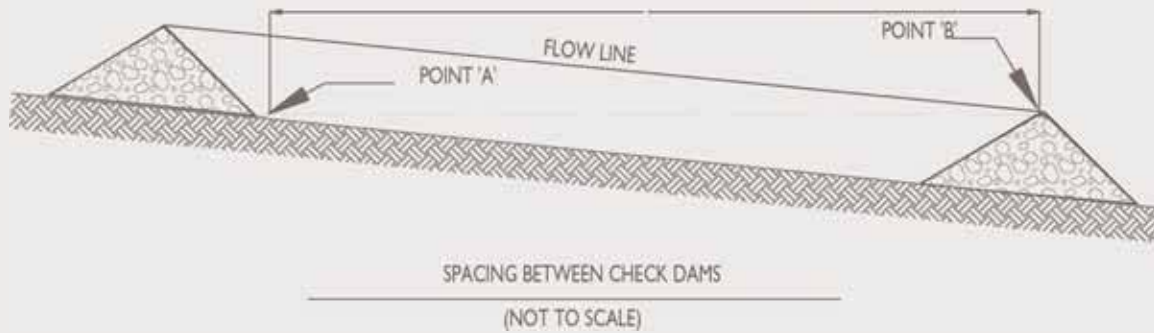

Source: USDA-NRCS